

DATASHEET




The QuadCore is a solid-state lighting controller in the CueCore family. It features 2,048 DMX channels across 4 DMX outputs. The onboard flash memory allows for storing DMX shows. Playback can be fully automated and triggered by various IP based protocols. The QuadCore is bundled with the CueluxPro software-based lighting control desk.



Specifications

- 4 x DMX-512 opto-isolated bi-directional port
- Ethernet port
- Real-Time Clock with battery backup
- Supports Art-Net, sACN, KiNet, HTTP, TCP, UDP & OSC
- Desktop or DIN Rail mounted
- Kensington lock
- Temperature range -20° / +50° Celsius
- PoE Class I

Connection scheme

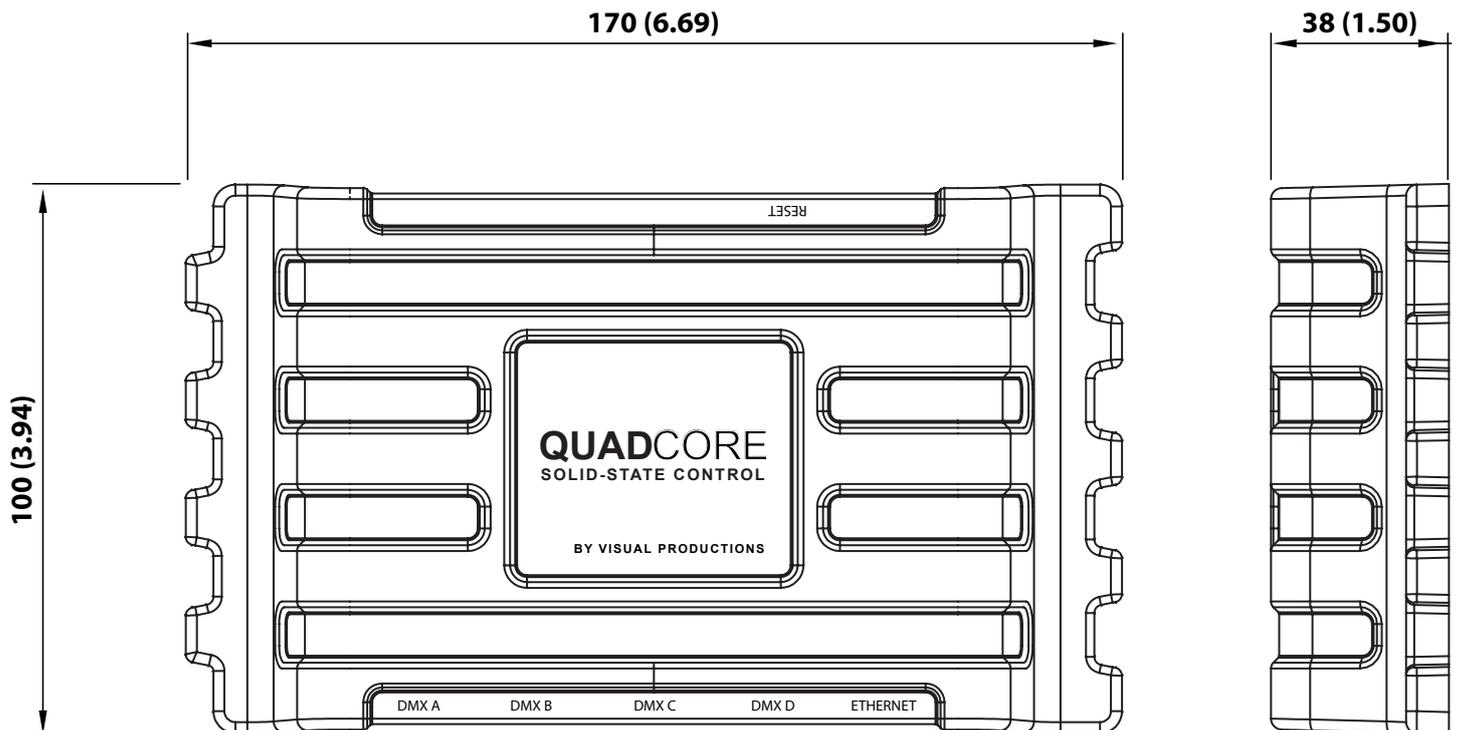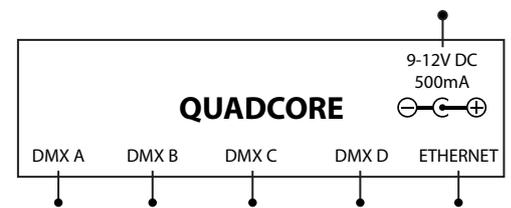

mm (inch)