


# xVision Totem Indoor 2.5 mm single width

## Specifications

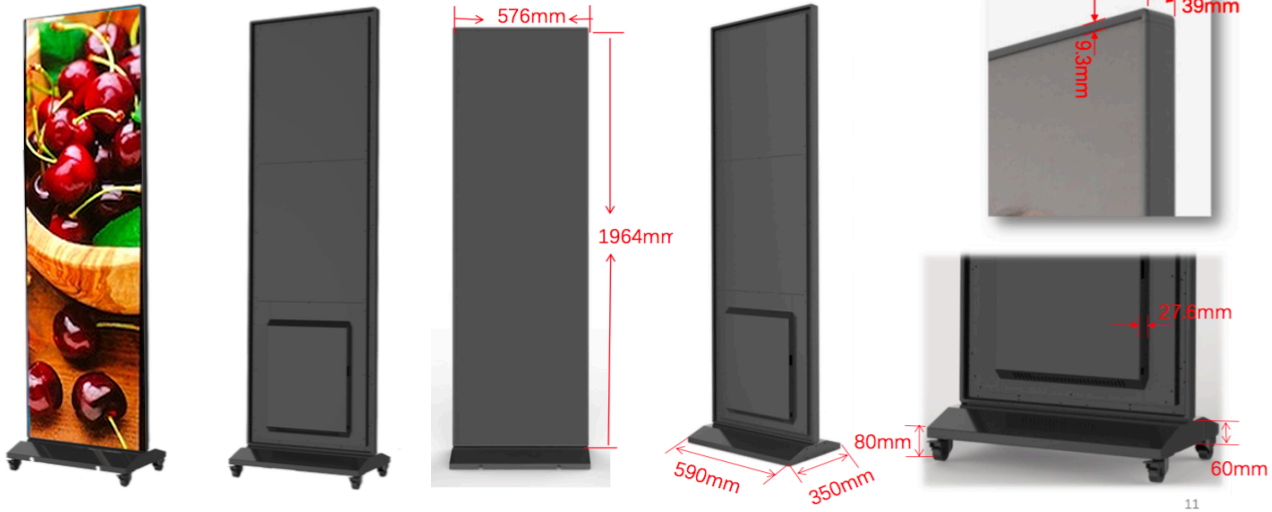

11

<b>Pixel</b>	Packaging Pixel Pitch	RGB SMD 3-in1 LED 2.571 mm
<b>Mechanical</b>	Cabinet Resolution Cabinet dimensions (W x h) Cabinet Weight Cabinet thickness (d) Module resolution Module dimensions (W x h) Installation Cooling	224 x 756 px 596 x 1964 mm 36 kg 39 mm (excl. control box and base) 112 x 84 pixels 288 x 216 mm Wall mount, floor stand Passive
<b>Optical</b>	Brightness Lifespan Color Temperature Horizontal Viewing Angle Vertical Viewing Angle	> 800 Nits 50,000 hours 6500K 160 degrees 160 degrees
<b>Electrical</b>	Max Power Consumption Average Power Consumption Input Voltage	600 watts / unit 210 watts / unit 100-240V, 50-60Hz auto-ranging
<b>Processing</b>	Driving Mode Grayscale depth Refresh Rate Video Frame Rate Control System	1/28 TBC Up to 4000 Hz 60 Hz Novastar Taurus Series
<b>Environmental</b>	Protection Rating Operating Temperature Operating Humidity Warranty	IP40 -10C @ +50C 10-90% RH 2 years

Application example

