



xVision Video Converter

Optical Fiber to SDI Receiver

TXVV-FIBER2SDI

Professional equipment in mission-critical applications is all about reliability and confidence. So we started with a clean sheet, and built what may soon become your most trustworthy piece of equipment.

Introducing the world's first video converters *truly* designed for the road. Video converters nowadays are used everywhere on professional A/V events, presentations, live shows and tours and often have a critical role. Yet, they are often the weakest link in the signal chain. Low quality connectors, weak enclosure, external consumer-grade power supply, and overall barebones design that all contribute to a generally unreliable piece of equipment. We wanted to change that, so we designed the xVision Video Converters.





DESIGNED & MANUFACTURED
IN CANADA



Features

- ✓ **Integrated power supply** with locking PowerCON Connector. Never rely on a cluster of wall-warts again.
- ✓ **Built-in convenience AC outlet** to power nearby projector, TV, laptop, small video projector... Power bar to power both the converter and device not required anymore.
- ✓ **Magnetic stacking system** and non-skid rubber pad for table top application. Saves at least 10 gaffer tape rolls a year.
- ✓ **Multiple mounting options:** C-Clamp, wall-mount adapter, LCD mount adapter and belt adaptor.
- ✓ **Rugged, Tour-ready and aesthetic enclosure:** The sexiest widget in your tool box, that will keep looking good for years to come.
- ✓ **Plug-n-play operation**; No dipswitches, buttons or menus to fumble with: It just works.
- ✓ Clear and ample status **LED indicators** for quick troubleshooting.
- ✓ **Easy on-the-field identification** with unique color and alphabetic coding system.
- ✓ **Reclocked and amplified SDI loop thru**
- ✓ Proudly designed and assembled **in Canada**.
- ✓ SFP-based video transmission for interoperability with standard SDI over fiber devices.
- ✓ Choice of three optical connectors, each available as single-mode and multimode types.

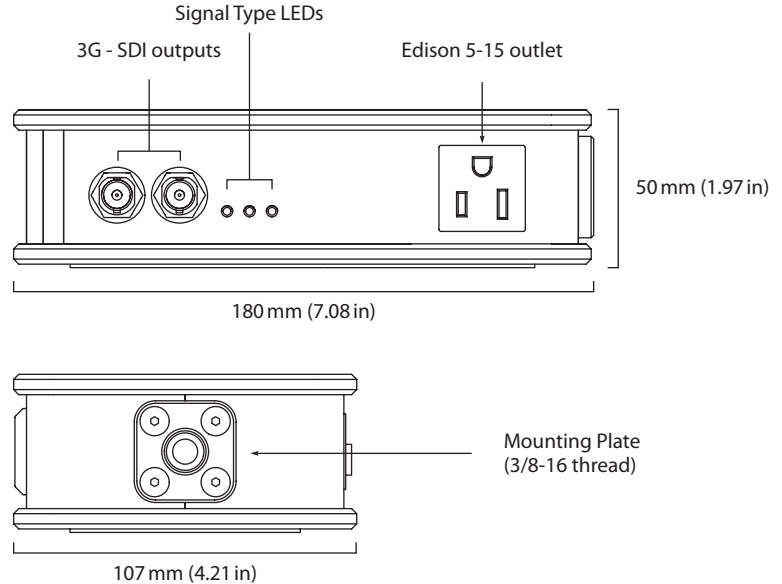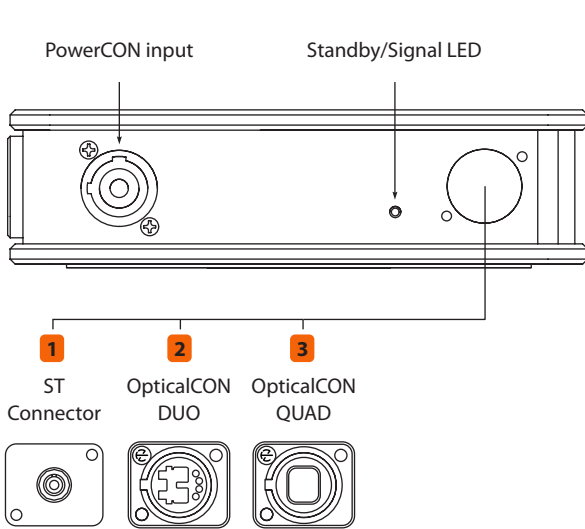

Connections

Video Input	Optical SDI on ST/OpticalCON DUO/OpticalCON QUAD, Multimode or Singlemode .
Video Output	3G/HD/SD SDI BNC

Supported Signals

Video Format Support 3G-SDI Level A and B, HD-SDI, SD-SDI with embedded audio.

Physical Specifications

Height	50 mm (1.97 in)
Depth	180 mm (7.08 in)
Width	107 mm (4.21 in)
Weight	1 kg (2.2 lbs)

Environmental Specifications

Relative Humidity 0% to 90% non-condensing

Power Requirements

Power Supply	Built-in power supply PowerCON input Edison Nema 5-15 output
Power Consumption	25W
Operational Voltage Range	90-125V 90-250V also available (with PowerCON True1)
Courtesy Outlet	Max 10A, same voltage as input

In the box

- xVision converter Fiber to SDI
- AC Mains PowerCon cable (1.5 m, specify plug type at ordering)

Certification

This device complies with the following international standards	CAN/CSA-C22.2 NO. 60950-1-07 UL 60950-1 FCC Part 15 Class A EN 60950-1, EN 55022
--	---

Ordering information

TXVV-SDI2FIBER-	1	1	xVision SDI to FIBER Transmitter
TXVV-FIBER2SDI-	1	1	xVision FIBER to SDI Receiver
Singlemode:	S	1	: ST Connector
Multimode:	M	2	: OpticalCON DUO
		3	: OpticalCON QUAD

XVV-CC1	xVision Video Converter Carrying Case for 1 unit
XVV-CC2	xVision Video Converter Carrying Case for 2 units
XVV-CC3	xVision Video Converter Carrying Case for 3 units