

# xVision Video Converter SDI Audio DeEmbedder

#### **TXVV-SDI2AUDIO**

Professional equipment in mission-critical applications is all about reliability and confidence. So we started with a clean sheet, and built what may soon become your most trustworthy piece of equipment.

Introducing the world's first video converters *truly* designed for the road. Video converters nowadays are used everywhere on profesionnal A/V events, presentations, live shows and tours and often have a critical role. Yet, they are often the weakest link in the signal chain. Low quality connectors, weak enclosure, external consumer-grade power supply, and overall barebones design that all contribute to a generally unreliable piece of equipment. We wanted to change that, so we designed the xVision Video Converters.

















#### **Features**

- ✓ Integrated power supply with locking PowerCON Connector. Never rely on a cluster of wall-warts again.
- ✓ Built-in convenience AC outlet to power nearby projector, TV, laptop, small video projector... Power bar to power both the converter and device not required anymore.
- ✓ Magnetic stacking system and non-skid rubber pad for table top application. Saves at least 10 gaffer tape rolls a year.
- ✓ Multiple mounting options: C-Clamp, wall-mount adapter, LCD mount adapter and belt adaptor.
- ✓ Rugged, Tour-ready and aesthetic enclosure: The sexiest widget in your tool box, that will keep looking good for years to come.

- ✓ Plug-n-play operation; No dipswitches, buttons or menus to fumble with: It just works.
- ✓ Clear and ample status LED indicators for quick troubleshooting.
- ✓ Easy on-the-field identification with unique color and alphabetic coding system.
- ✓ Locking HDMI port prevents accidental disconnection.
- ✓ Reclocked and amplified SDI loop thru
- ✓ Proudly designed and assembled in Canada.
- ✓ Professional balanced -4dB XLR analog audio outputs each with a 3-segment LED meter.





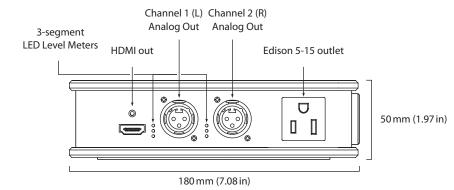

**Video Input** 3G/HD/SD SDI BNC

**Video Output** HDMI 1.2 type A with lock system

3G/HD/SD SDI BNC (reclocked loop thru)

**Audio Output** 2 x Balanced +4dB XLR (analog) with level meters

## Mounting Plate (3/8-16 thread) 107 mm (4.21 in)

#### **Supported Signals**

**3G Format Support** 1080p50, 1080p59.94, 1080p60.

**HD Format Support** 720p50, 720p59.94, 720p60, 1080i50, 1080i59.94,

1080i60, 1080p23.98, 1080PsF23.98, 1080p24, 1080PsF24, 1080p25, 1080PsF25, 1080p29.97,

1080PsF29.97, 1080p30, 1080PsF30

**SD Format Support** 525/23.98 NTSC, 525/29.97 NTSC.625/25 PAL.

SDI Video Sampling 4:2:2 and 4:4:4

**SDI Audio Sampling** Sample rate of 48 kHz and 24 bit.

**SDI Color Space** YUV and RGB

**SDI Auto Switching** Automatically detects incoming signal format.

**De-embedding** SDI Channels 1 & 2

#### **Physical Specifications**

Height 50 mm (1.97 in) Depth 180 mm (7.08 in) Width 107 mm (4.21 in) Weight 1 kg (2.2 lbs)

### **Environnemental Specifications**

**Relative Humidity** 0% to 90% non-condensing

In the box xVision converter SDI to HDMI

HDMI male with locking system to DVI male (1m)

Edison to PowerCON (1m)

#### **Power Requirements**

**Power Supply** Built-in power supply

PowerCON input

Edison Nema 5-15 output

**Power Consumption** 25 W **Voltage Range** 

90-125 V

[90-250V also available with PowerCON True1]

**Courtesy Outlet** Max 10 A, same voltage as input

#### Certification

This device complies CAN/CSA-C22.2 NO. 60950-1-07

with the following UL 60950-1

international standards FCC Part 15 Class A

#### Ordering information

| TXVV-HDMI2SDIxVision HDMI to SDI converter               |
|--|
| TXVV-SDI2HDMIxVision SDI to HDMI converter               |
| TXVV-SDIDAxVision SDI Distribution Amplifier (4 outputs) |
| TXVV-SDI2AUDIOxVision SDI Audio DeEmbedder               |

| XVV-CC1 | xVision Video Converter Carrying Case for 1 unit  |
|---------|---|
| XVV-CC2 | xVision Video Converter Carrying Case for 2 units |
| XVV-CC3 | xVision Video Converter Carrying Case for 3 units |